

# Performa™ Cv Control Valves

273 and 278 Configurations



Pentair Water® offers a full range of Autotrol® Control Valves to meet a wide range of water conditioning applications.

## Logix™ Series

### 742 Time Clock

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration setting
- 12-volt operation
- Fits standard 1/2" and 3/4" IT with one controller
- Fully programmable cycle times
- Salt setting in 1-pound increments
- Operates 255, 263, 268, 273, 278, and Magnum


- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration setting
- 12-volt operation
- Fits standard 1/2" and 3/4" IT with one controller
- Fully programmable cycle times
- Salt setting in 1-pound increments
- Operates 255, 263, 268, 273, 278, and Magnum

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration setting
- 12-volt operation
- Fits standard 1/2" and 3/4" IT with one controller



10001

10001

10001

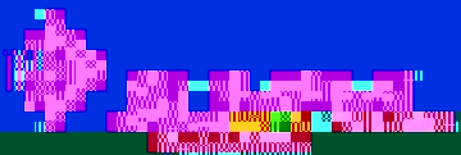



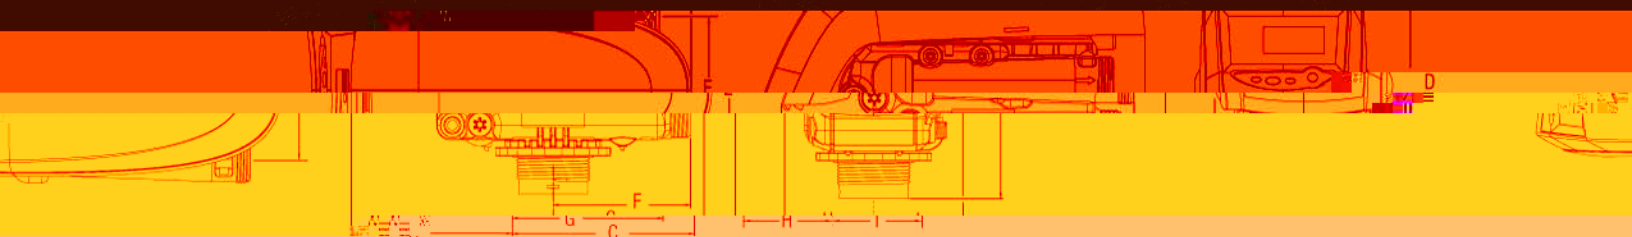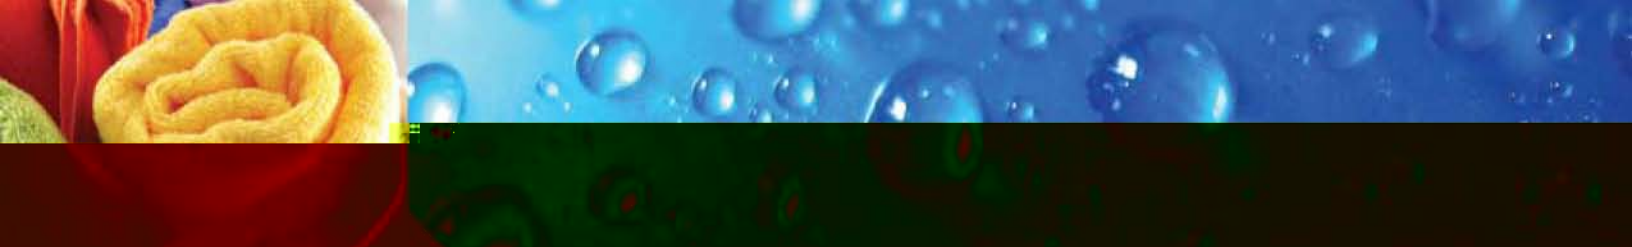

									Units
A	B	C	D	E	F	G	H	I	
14.9	7.8	7.1	8.5	5.0	5.3	5.8	3.4	3.4	inches
37.8	19.9	17.9	21.5	12.7	13.5	14.8	8.7	8.7	cm

## Performance

### Flow Rates (Valve On)

Service @ 4.5 psi (1.03 bar)


Backwash @ 0.5 gal/4"

Backwash @ 25 psi (1.72 bar) drop 20.0 gpm (4.5 m<sup>3</sup>/h)


# Injector\* Performance

## Logix™ Series Controllers


Injector "H" (Light Purple)  
For 9-inch Tanks

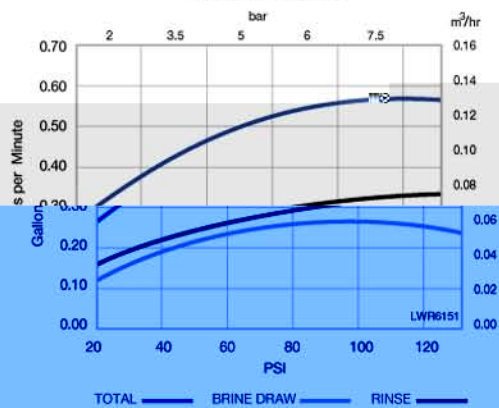


Injector "J" (Light Blue)  
For 10-inch Tanks

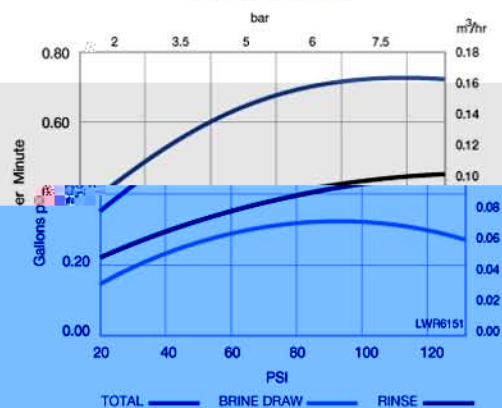

Injector "K" (Pink)  
For 12-inch Tanks

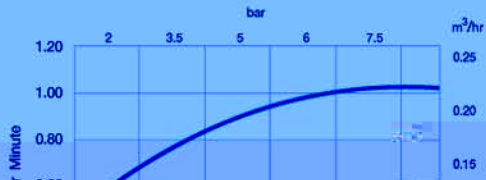

Injector "L" (Orange)  
For 13- and 14-inch Tanks

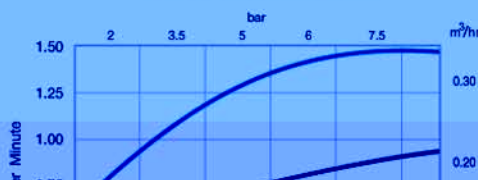

Injector "N" (Green)  
For 16-inch Tanks

